



installed by a qualified electrician.


Warning: all wires and wire nuts used in the installation must be rated 195f (90°C) for indoor use only these product must be

involved.
construction and operation of the product and the hazard with the applicable installation code by a person familiar with the locations only. This product must be installed in accordance during relamping, allow the bulb to cool down. Suitable for dry Disconnect power before servicing. To reduce the risk of a burn risk of fire. Use stated watt or smaller. Caution-risk of shock. Save these instructions. Min 90c supply conductors. Caution-

UL 1598 ELECTRICAL INSTRUCTION FOR FLUSHMOUNTS,
WALL SCONCES AND PENDANTS

ARO DOBLE


TUS.AD.402.01 TUS.AD.403.01
TUS.AD.402.02 TUS.AD.403.02

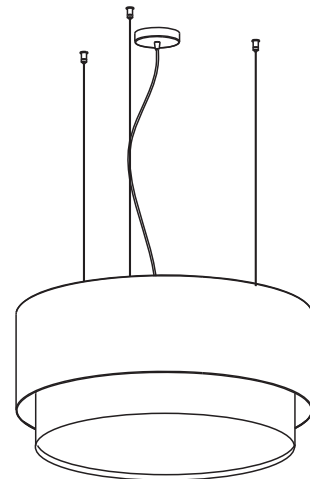

Assembly instructions



- The safety of this fixture is only guaranteed if the following instructions have been observed
- Always disconnect power before working on fixture.
- Replacement bulbs must be of same type and wattage as specified in instructions.
- Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp cloth and mild detergent.

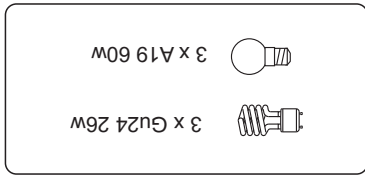

Input voltage: 110V - 60Hz

Light for indoor use only





el torrent

EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
Mieres (Girona) Spain

T. +34 972 680 291
F. +34 972 680 011
eltorrent@eltorrent.com

www.eltorrent.com

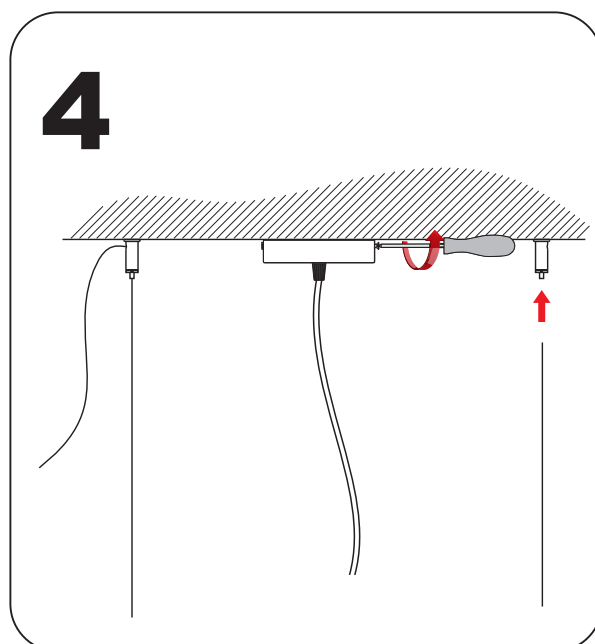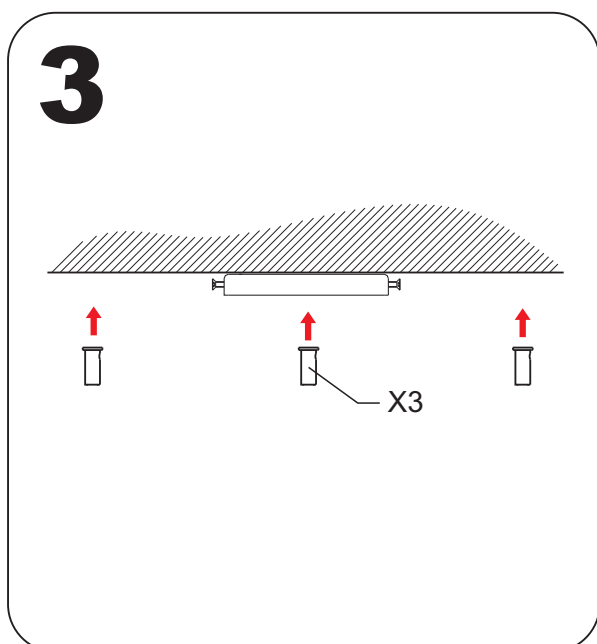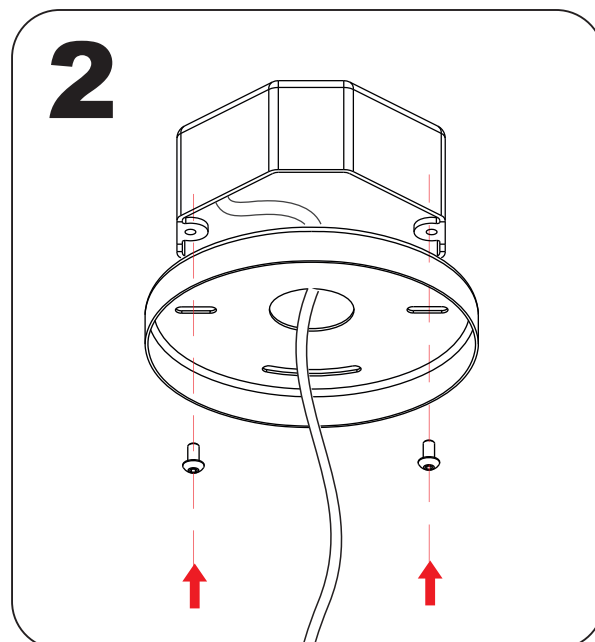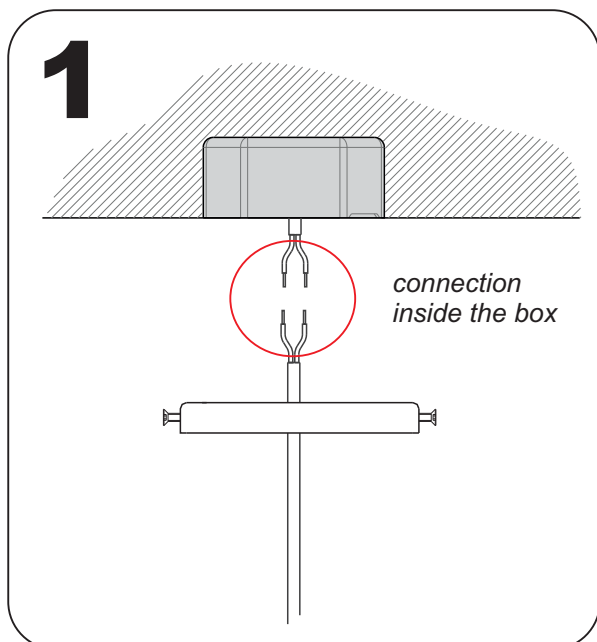

(See assembly instructions steel support cable)

Assembly instructions steel support cables of suspension luminaires

