




Warning: all wires and wire nuts used in the installation must be rated 195f (90°C) for indoor use only these product must be installed by a qualified electrician.

Save these instructions. Min 90c supply conductors. Caution-risk of fire. Use stated watt or smaller. Caution-risk of shock. Disconnect power before servicing. To reduce the risk of a burn during relamping, allow the bulb to cool down. Suitable for dry locations only. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazard involved.

UL 1598 ELECTRICAL INSTRUCTION FOR FLUSHMOUNTS, WALL SCENCES AND PENDANTS


ARO DOBLE

TUS.AD.404.01 TUS.AD.405.01
TUS.AD.404.02 TUS.AD.405.02

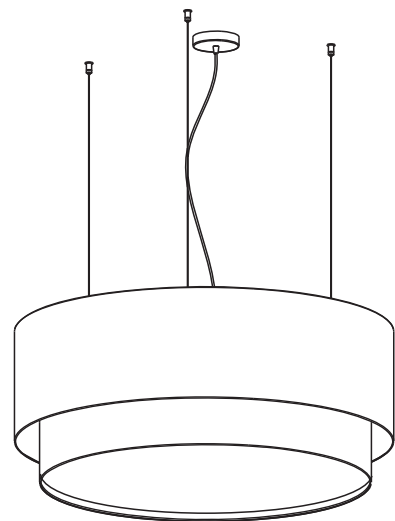

Assembly instructions

- The safety of this fixture is only guaranteed if the following instructions have been observed
- Always disconnect power before working on fixture.
- Replacement bulbs must be of same type and wattage as specified in instructions.
- Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp cloth and mild detergent.

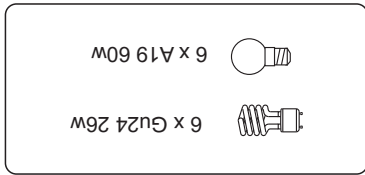

Light for indoor use only
Input voltage: 120V - 60Hz





el torrent

EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
Mieres (Girona) Spain

T. +34 972 680 291
F. +34 972 680 011
eltorrent@eltorrent.com

www.eltorrent.com

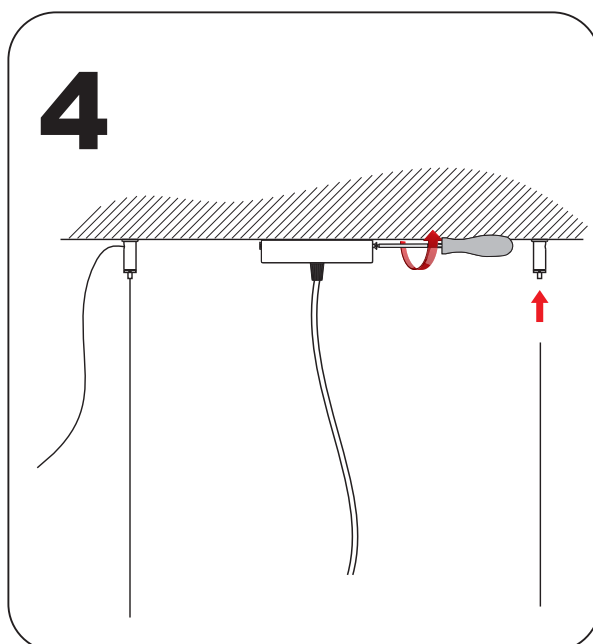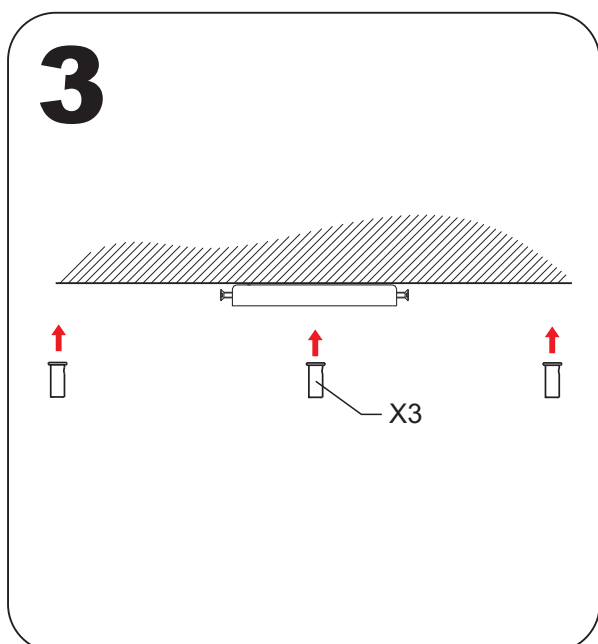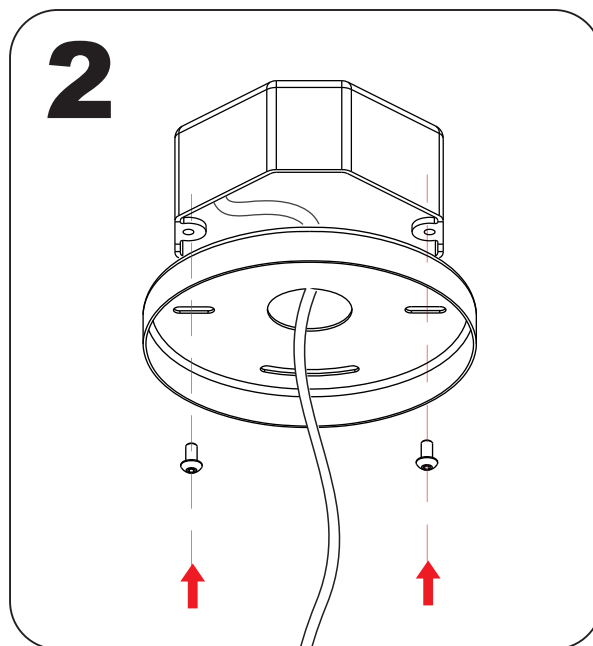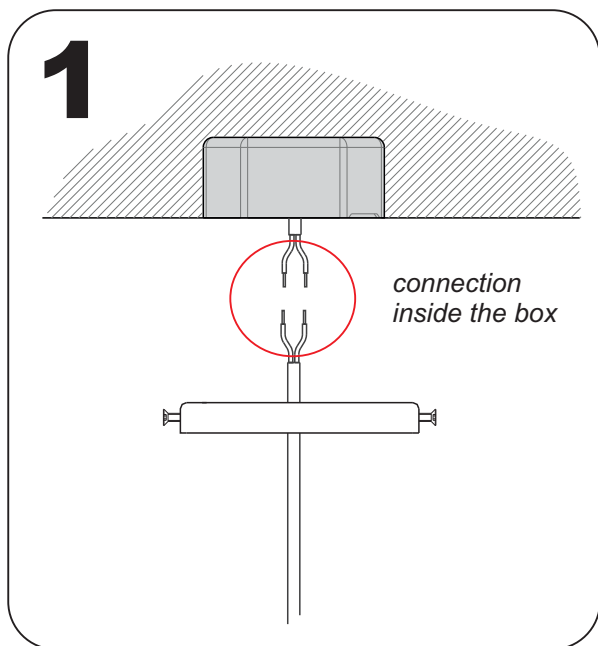

(See assembly instructions steel support cable)

Assembly instructions steel support cables of suspension luminaires

