

Des surfaces métalliques, le verre ou d'autres parties peuvent être
 puissance en watts que spécifié dans des instructions.
 Les ampoules de remplacement doivent être de même type et la
 Avant de monter/déconnecter le courant:
 respecter les instructions suivants.
 La sécurité du montage est seulement garanti si vous avez



Metal surfaces, glass or other parts of fixture may be cleaned with a
 in instructions.
 Replacement bulbs must be of same type and wattage as specified
 Always disconnect power before working on fixture.
 instructions have been observed.
 The safety of this fixture is only guaranteed if the following



TUS.RG.S080.17	LED 46W 450mA 2700K 5200lm Dimmable 1-10V
TUS.RG.S120.17	LED 66.5W 450mA 2700K 8100lm Dimmable 1-10V

Light for indoor use only
Seulement pour éclairage intérieur
Tension d'entrée: 120-277V / 50-60Hz
Input voltage: 120-277V / 50-60Hz



use only these product must be installed by a qualified electrician.
 Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor
 involved.
 by a person familiar with the construction and operation of the product and the hazard
 applicable installation code.
 Allowed for damp locations. This product must be installed in accordance with the
 authorization and instructions from the manufacturer.
 Isn't allowed to change or replace any of the components involved on this piece without the
 before servicing.
 Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power
 Save these instructions. Min 90c supply conductors.
ELECTRICAL INSTRUCTIONS FOR LAMPS WITH LED TECHNOLOGI.

UL8750.

use only these product must be installed by a qualified electrician.
 Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor
 involved.
 by a person familiar with the construction and operation of the product and the hazard
 This product must be installed in accordance with the applicable installation code.
 damp locations.
 To reduce the risk of a burn during replacing, allow to the bulb to cool down. Allowed for
 before servicing.
 Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power
 Save these instructions. Min 90c supply conductors.
ELECTRICAL INSTRUCTIONS FOR FLUSHMOUNTS, WALL SCONCES, AND PENDANTS.

UL1598.

RING




EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
 Mieres (Girona) Spain



T. +34 972 680 291
 F. +34 972 680 011
 eltorrent@eltorrent.com

www.eltorrent.com

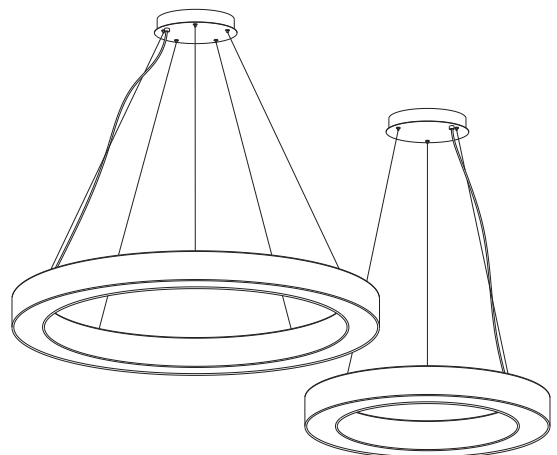


Assembly instructions
Instructions de montage


1

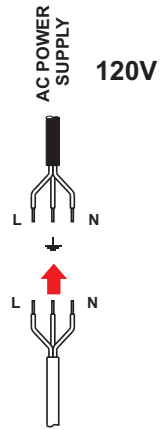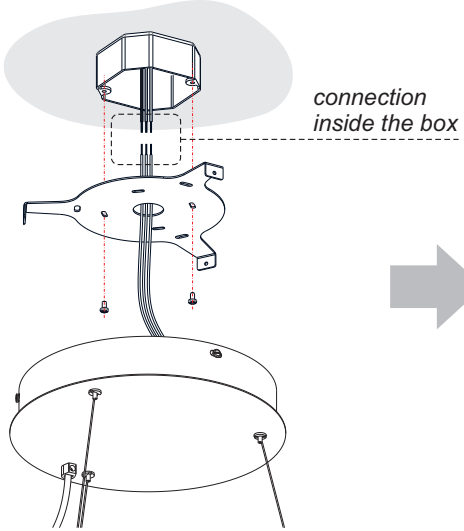


2

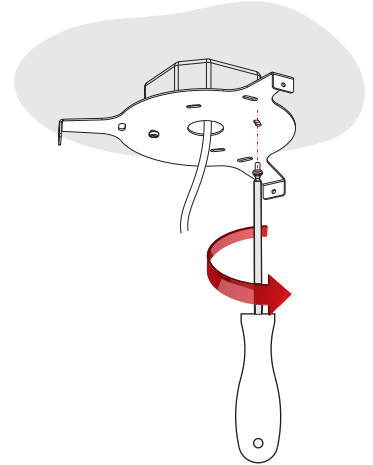


3

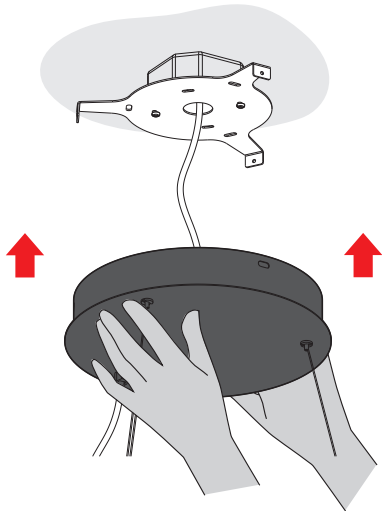

4

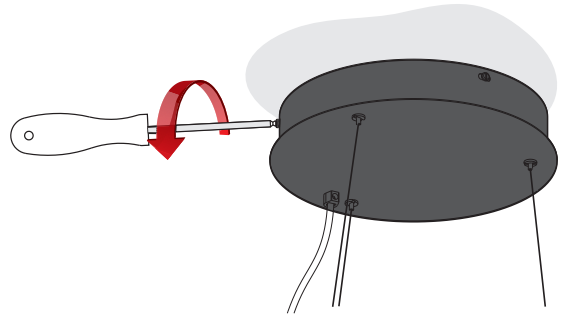

5

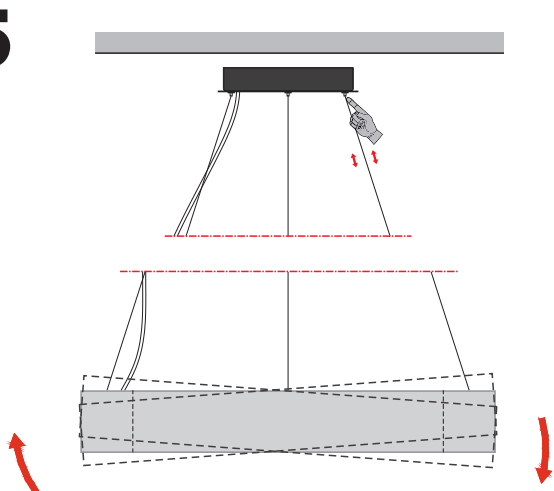

Straighten lampshade
Nivelar la pantalla

