


OV.100 / TUS.OV.100

Typology: Suspension

Description Descripción

Pendant luminaire incorporating a high-efficiency LED system mounted on a top metal plate, combined with an opal PMMA diffuser. It includes a nickel ceiling rose and a transparent electrical cable. It allows dimming via DALI or PUSH systems, and its shade is customizable in any material.

Luminaria de suspensión que incorpora un sistema de LED de alta eficiencia montado sobre una plancha superior metálica y combinado con un difusor de PMMA opal. Incluye florón en níquel y cable eléctrico transparente. Permite regulación mediante sistema DALI o PUSH, y su pantalla es personalizable en cualquier material.

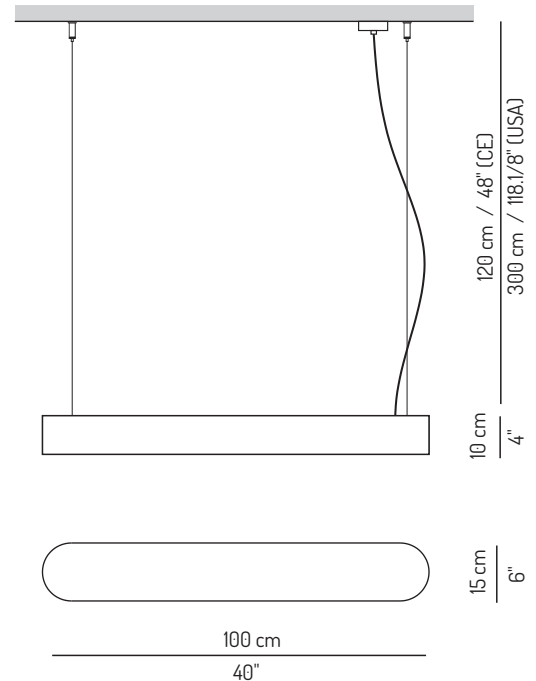

Light Source Fuente de luz

Voltage Voltaje 220-230V / 50-60Hz
120V / 60Hz (USA)

European version

OV.100.17 LED 33W 325mA 2700K 3800lm
Dimmable Push

OV.100.18 LED 33W 325mA 2700K 3800lm
Dimmable DALI

USA version

TUS.OV.100.17 LED 33W 325mA 2700K 3800lm
Dimmable 1-10V

Module LED included / Módulo LED incluido

Packaging Embalaje

1 box

30x28x110 cm / 0,09m³
12"x11"x40" / 3,17 ft³

Peso bruto: 10 Kg
Gross Weight: 22,05 lb

Materials & Finishings Materiales y acabados

Lampshade Pantalla Available in any material
Disponible en cualquier material

Canopy Florón Nickel
Níquelado

Electrical cable Cable eléctrico Silicone transparent
Silicona transparente

Diffuser Difusor PMMA 3mm / matt ice
PMMA 3mm / hielo mate

Certifications:



IP20

Light for indoor use only / Luminaria solo para uso interior


OV.140 / TUS.OV.140

Typology: Suspension

Description Descripción

Pendant luminaire incorporating a high-efficiency LED system mounted on a top metal plate, combined with an opal PMMA diffuser. It includes a nickel ceiling rose and a transparent electrical cable. It allows dimming via DALI or PUSH systems, and its shade is customizable in any material.

Luminaria de suspensión que incorpora un sistema de LED de alta eficiencia montado sobre una plancha superior metálica y combinado con un difusor de PMMA opal. Incluye florón en níquel y cable eléctrico transparente. Permite regulación mediante sistema DALI o PUSH, y su pantalla es personalizable en cualquier material.

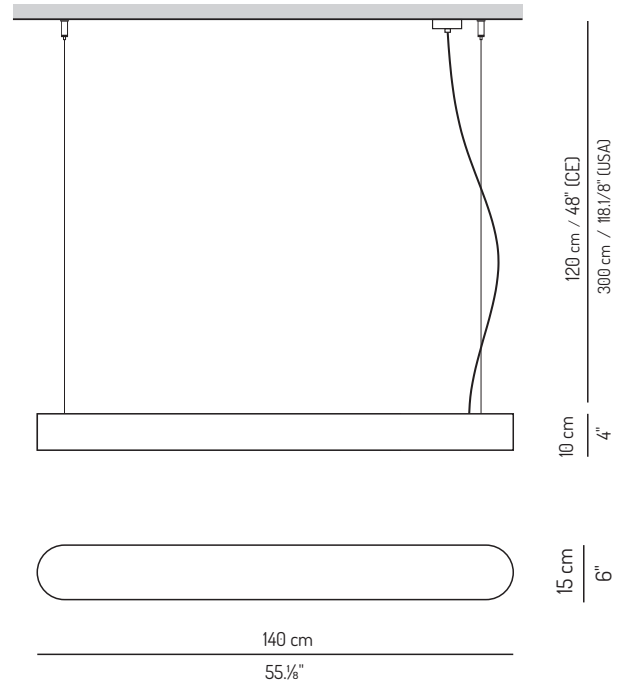

Light Source Fuente de luz

Voltage Voltaje 220-230V / 50-60Hz
120V / 60Hz (USA)

European version

OV.140.17 LED 45W 325mA 2700K 4800lm
Dimmable Push

OV.140.18 LED 45W 325mA 2700K 4800lm
Dimmable DALI

USA version

TUS.OV.140.17 LED 45W 325mA 2700K 4800lm
Dimmable 1-10V

Module LED included / Módulo LED incluido

Packaging Embalaje

1 box

30x27x144 cm / 0,11m³
12"x11"x56" / 3,88 ft³

Peso bruto: 11 Kg
Gross Weight: 24,25 lb

Materials & Finishings Materiales y acabados

Lampshade Pantalla Available in any material
Disponible en cualquier material

Canopy Florón Nickel
Niquelado

Electrical cable Cable eléctrico Silicone transparent
Silicona transparente

Diffuser Difusor PMMA 3mm / matt ice
PMMA 3mm / hielo mate

Certifications:



Light for indoor use only / Luminaria solo para uso interior