


el torrent

EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
Mieres (Girona) Spain

T. +34 972 680 291
F. +34 972 680 011
eltorrent@eltorrent.com

www.eltorrent.com

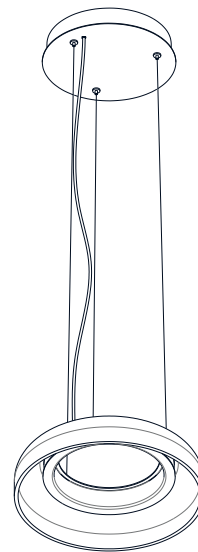

Assembly instructions
Instructions de montage

NUT

U11598.

ELECTRICAL INSTRUCTIONS FOR FLUSHMOUNTS, WALL SCONCES , AND PENDANTS.

Save these instructions. Min 90c supply conductors.

Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power before

servicing.

To reduce the risk of a burn during replacing, allow to the bulb to cool down. Allowed for damp

locations.

This product must be installed in accordance with the applicable installation code.

Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor use

only these product must be installed by a qualified electrician.

UL8750.

ELECTRICAL INSTRUCTIONS FOR LAMPS WITH LED TECHNOLOGY.

Save these instructions. Min 90c supply conductors.

Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power before

servicing.

Isn't allowed to change or replace any of the components involved on this piece without the

authorization and instructions from the manufacturer.

Allowed for damp locations. This product must be installed in accordance with the applicable

installation code.

Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor use

only these product must be installed by a qualified electrician.

LED included

NT.S031.16 LED 15W 24V 2700K 2500lm



observed.

Always disconnect power before working on fixture.

Replacement bulbs must be of same type and wattage as specified in instructions.

Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp cloth and

mild detergent.

Lea

La seguridad del montaje está garantizada si usted respeta las instrucciones

siguientes:

Las bombillas de remplazamiento deben de ser del mismo tipo y de la potencia en watts que

especifica en las instrucciones.

Des superficies metálicas, vidrio u otros partes pueden ser limpiados con un tejido

húmedo suave y un detergente suave.



Intertek

