


el torrent

EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
Mieres (Girona) Spain

T. +34 972 680 291
F. +34 972 680 011
eltorrent@eltorrent.com

www.eltorrent.com

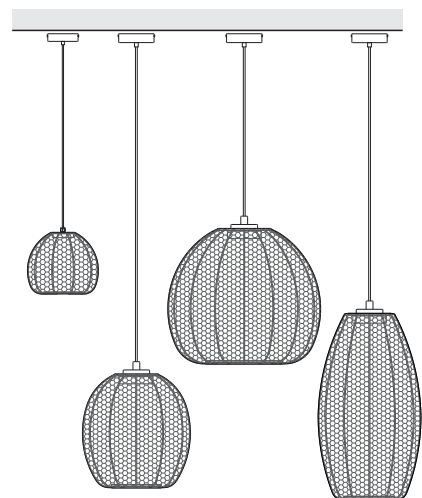

Assembly instructions
Instructions de montage

U1598.

ELECTRICAL INSTRUCTIONS FOR FLUSHMOUNTS, WALL SCONCES, AND PENDANTS.

Save these instructions. Min 90c supply conductors.

Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power

before servicing.

To reduce the risk of a burn during replacing, allow to the bulb to cool down. Allowed for

damp locations.

This product must be installed in accordance with the applicable installation code.

by a person familiar with the construction and operation of the product and the hazard

involved.

Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor

use only these product must be installed by a qualified electrician.

U18750.

ELECTRICAL INSTRUCTIONS FOR LAMPS WITH LED TECHNOLOGI.

Save these instructions. Min 90c supply conductors.

Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power

before servicing.

Isn't allowed to change or replace any of the components involved on this piece without the

authorization and instructions from the manufacturer.

Allowed for damp locations. This product must be installed in accordance with the

applicable installation code.

by a person familiar with the construction and operation of the product and the hazard

involved.

Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor

use only these product must be installed by a qualified electrician.



FR

La securite du montage est seulement garanti si vous avez respecter les instructions suivants.
Avant de monter déconnecter le courant.
Les ampoules de remplacement doivent être de même type et la puissance en watts que
spécifié dans des instructions.
Des surfaces métalliques, le verre ou d'autres parties peuvent être nettoyés avec un tissu
humide doux et un détergent doux

EN

The safety of this fixture is only guaranteed if the following instructions have
been observed.
Always disconnect power before working on fixture.
Replacement bulbs must be of same type and wattage as specified in
instructions.
Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp
cloth and mild detergent.



TUS.CA.S134.16	LED 12W350mA 2700K 1500lm	TRIAC dimmable
TUS.CA.S151.16	LED 4.5W 500mA 2700K 920lm	TRIAC dimmable
TUS.CA.S123.16		

Module LED included

Light for outdoor use
Luminière pour usage extérieur
Tension d'entrée: 120V - 60Hz
Input voltage: 120V - 60Hz

