MEISY

Outdoor

Assembly instructions
Instructions de montage

[Read all instructions and then save them]

EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
Mieres (Girona) Spain

T. +34 972 680 291
F. +34 972 680 011
eltorrent@eltorrent.com

www.eltorrent.com

Light for outdoor use
Luminère pour usage extérieur
Tensión d'entrée: 120V - 60Hz
Input voltage: 120V - 60Hz

TUS.MY.F130.16
TUS.MY.F146.16
LED 10W 120V 880lm 2700K
TRIAC dimming

IP54

DAMP
Location

EN

The safety of this fixture is only guaranteed if the following instructions have been observed.

Always disconnect power before working on fixture.

Replacement bulbs must be of same type and wattage as specified in istructions.

Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp cloth and mild detergent.

FR

La securité du montage est seulement garanti si vous avez respecter les instructions suivants.

Avant de monter déconnecter le courant.

Les ampoules de remplacement doivent être de même type et la puissance en watts que spécifié dans des instructions.

Des surfaces métalliques, le verre ou d'autres parties peuvent être nettoyés avec un tissu humide doux et un détergent doux


UL598.
ELECTRICAL INSTRUCTIONS FOR FLUSHMOUNTS, WALL SCONCES, AND PENDANTS.
Save these instructions. Min 90c supply conductors.
Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power before servicing.
To reduce the risk of a burn during replacing, allow to the bulb to cool down. Allowed for damp locations.
This product must be installed in accordance with the applicable installation code.
by a person familiar with the construction and operation of the product and the hazard involved.
Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor use only these product must be installed by a qualified electrician.


UL8750.
ELECTRICAL INSTRUCTIONS FOR LAMPS WITH LED THECNOLOGI.
Save these instructions. Min 90c supply conductors.
Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power before servicing.
Isn't allowed to change or replace any of the components involved on this piece without the authorization and instructions from the manufacturer.
Allowed for damp locations. This product must be installed in accordance with the applicable installation code.
by a person familiar with the construction and operation of the product and the hazard involved.
Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor use only these product must be installed by a qualified electrician.


Warning: Safety precautions should always be followed to reduce risk of fire, electric shok, and personal injury.


Use only three-wire extension cords approved for outdoor use according to regulations

Intertek

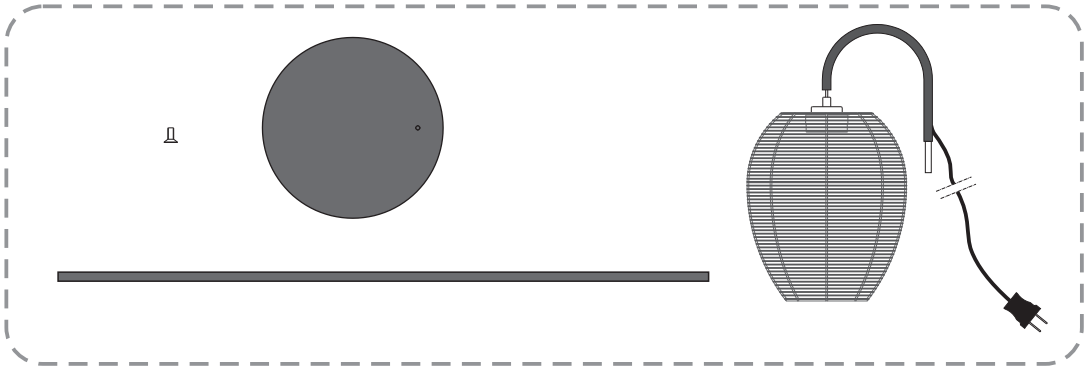

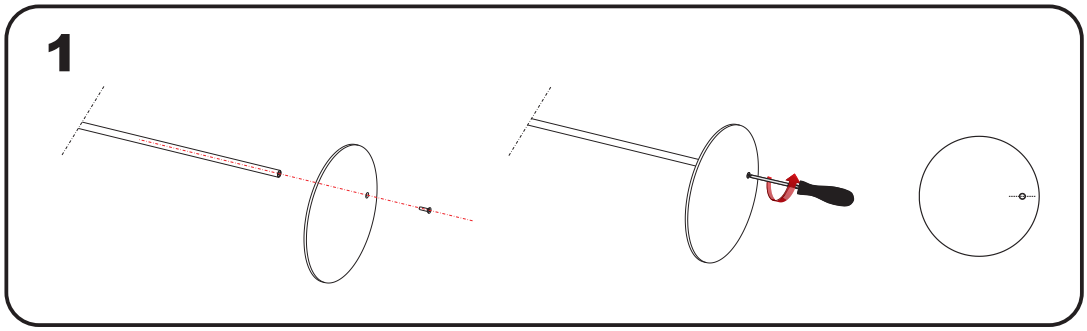

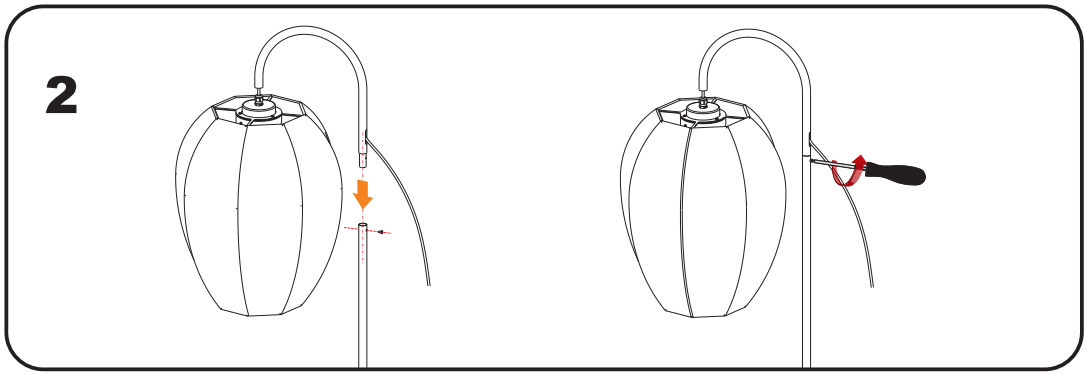

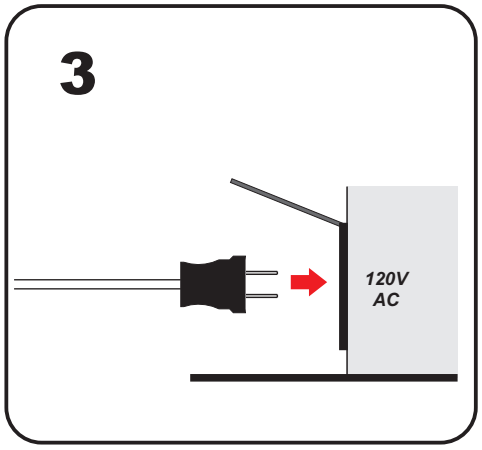

TRIAC Dimming system:

The LED COB module, are dimmable with common phase-cut dimmers. Minimum dimmer load has to be observed.

El módulo LED COB, es regulable con reguladores de corte de fase comunes. Se debe observar la carga mínima del regualdor.

This product has polarized plug (two different bilider sizes) as a feature to reduce the risk of electric shock.
This plug will fit only one way, If It does not fit contact a qualified electrician.
Never use it an extension cord unless can be fully inserted. Do not alter the plug.

IMPORTANT SAFETY INSTRUCTIONS

a) Use only three-wire outdoor extension cords that have three-prong grounding plugs and grounding receptacles that accept the appliance's plug. b) Ground Fault Circuit Interrupter (GFCI) protection is to be provided on the circuit(s) or outlet(s) to be used for the wet location portable luminaire. Receptacles are available having built-in GFCI protection and are able to be used for this measure of safety. c) Use only with an extension cord for outdoor use, such as an extension cord of cord type SEW, SEOW, SEOOW, SOW, SOOW, STW, STOW, STOOW, SJEW, SJEOW, SJEOOW, SJW, SJOW, SJOOW, SJTW, SJTOW, or SJTOOW.