# MEISY



Assembly instructions /
Instructions de montage

# el torrent

EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
Mieres (Girona) Spain

T. +34 972 680 291
F. +34 972 680 011
eltorrent@eltorrent.com

www.eltorrent.com

## UL 1598 + UL 8750

ELECTRICAL INSTRUCTIONS FOR FIXED LED LUMINAIRES

Read all instructions before using this product.

WARNING

This product must be installed in accordance with applicable electrical codes by a person familiar with the construction and operation of the product and the hazards involved.

Use supply conductors rated for at least 90°C (194°F), where required by the product certification.

The LED module is not user-replaceable. Contact EL TORRENT for servicing or replacement.

SAVE THESE INSTRUCTIONS

## UL 1598

ELECTRICAL INSTRUCTIONS FOR FIXED LUMINAIRES

Read all instructions before using this product.

CAUTION

Risk of fire. Use only the type of bulb and maximum wattage specified on the luminaire.

Risk of electric shock. Disconnect power before installing, servicing or replacing the bulb.

To reduce the risk of burns, allow the bulb to cool down before replacing it.

This product must be installed in accordance with applicable electrical codes by a person familiar with the construction and operation of the product and the hazards involved.

Use supply conductors rated for at least 90°C (194°F), where required by the product certification.

SAVE THESE INSTRUCTIONS

Intertek

(EN)

- The safety of this fixture is only guaranteed if the following instructions have been executed.
- Always disconnect power before working on fixture.
- Replacement bulbs must be of same type and wattage as specified in instructions.
- Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp cloth and mild detergent.

(FR)

- La sécurité du montage et's seulement garanti si vous avez respecter les instructions suivants.
- Avant de monter déconnecter le courant.
- Les ampoules de remplacement doivent être de même type et la puissance en watts que spécifié dans des instructions.
- Des surfaces métalliques, le verre ou d'autres parties peuvent être nettoyés avec un tissu humide doux et un détergent doux.

Light for indoor use only
Seulement por éclairege intérieur


Input voltage: 120V / 50Hz
Tension d'entrée: 220V / 50Hz

| | |
|---|---|
| TUS.MY.S130.16<br>TUS.MY.S145.16 | LED 12W 24V 2700K 1500lm |
| TUS.MY.S130.02<br>TUS.MY.S145.02 | 1 x 13W LED Medium base 120V |


IP 54

WET Location


1

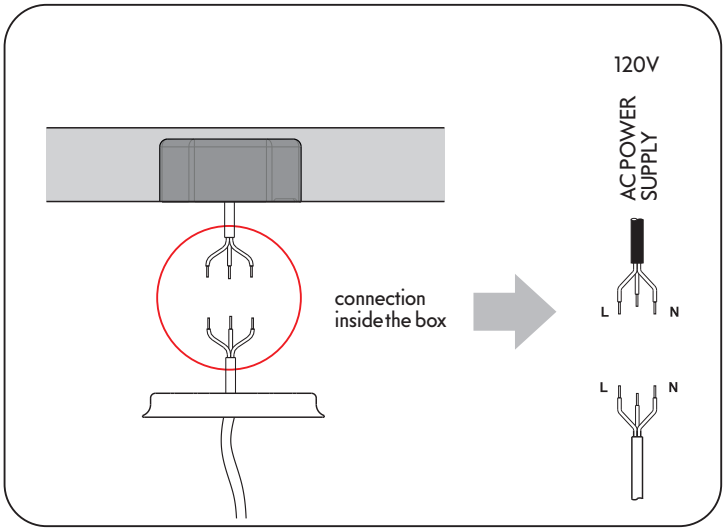


2

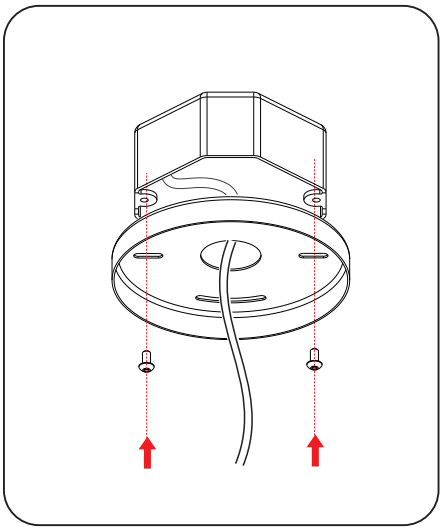

3

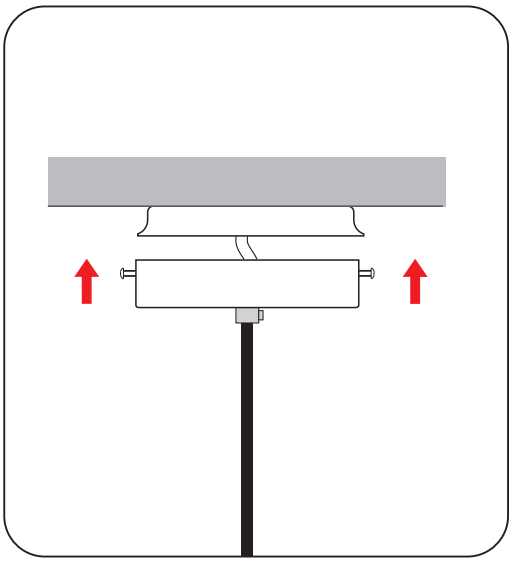

4

