EQUIS

Assembly instructions
Instructions de montage

EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
Mieres (Girona) Spain

T. +34 972 680 291
F. +34 972 680 011
eltorrent@eltorrent.com

www.eltorrent.com

el torrent

Light for indoor use only
Seulement pour éclairage intérieur

Tensión d'entrée: 120-277V / 50-60Hz
Input voltage: 120-277V / 50-60Hz

LED included

TUS.EQ.S035.16	LED 12W 24V 2700K	930lm
TUS.EQ.S070.16	LED 25W 24V 2700K	2000lm
TUS.EQ.S105.16	LED 39W 24V 2700K	3100lm

IP20

The safety of this fixture is only guaranteed if the following instructions have been observed.

Always disconnect power before working on fixture.

Replacement bulbs must be of same type and wattage as specified in instructions.

Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp cloth and mild detergent.

EN

La sécurité du montage est seulement garanti si vous avez respecter les instructions suivants.

Avant de monter déconnecter le courant.

Les ampoules de remplacement doivent être de même type et la puissance en watts que spécifié dans des instructions.

Des surfaces métalliques, le verre ou d'autres parties peuvent être nettoyés avec un tissu humide doux et un détergent doux.

FR

Intertek

UL8750.

ELECTRICAL INSTRUCTIONS FOR LAMPS WITH LED TECHNOLOGY.

Save these instructions. Min 90c supply conductors.

Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power before servicing.

Isn't allowed to change or replace any of the components involved on this piece without the authorization and instructions from the manufacturer.

Allowed for damp locations. This product must be installed in accordance with the applicable installation code.

by a person familiar with the construction and operation of the product and the hazard involved.

Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor use only these product must be installed by a qualified electrician.

UI1598.

ELECTRICAL INSTRUCTIONS FOR FLUSHMOUNTS, WALL SCONCES , AND PENDANTS.

Save these instructions. Min 90c supply conductors.

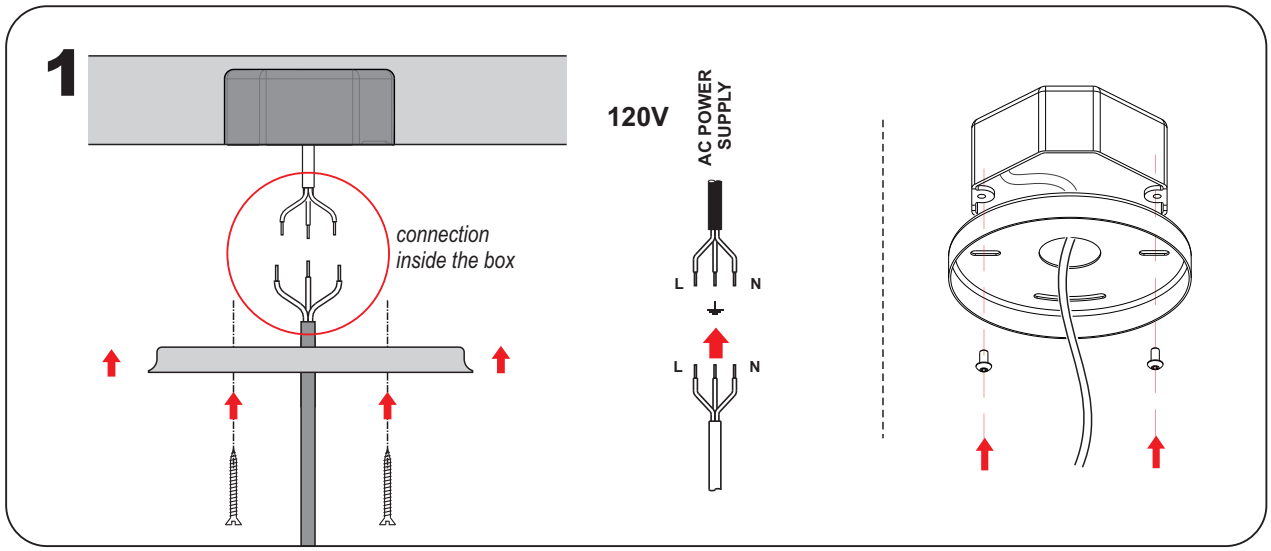
Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power before servicing.

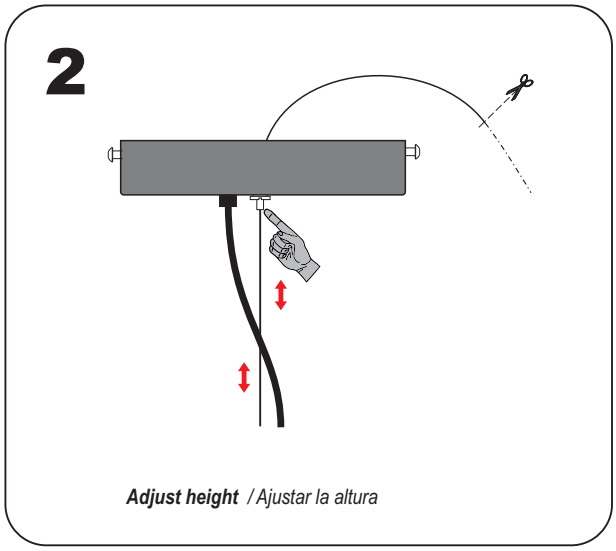
To reduce the risk of a burn during replacing, allow to the bulb to cool down. Allowed for damp locations.

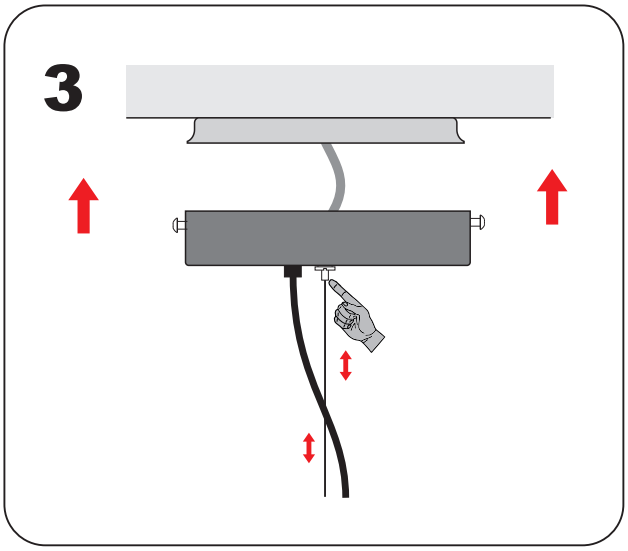
This product must be installed in accordance with the applicable installation code.

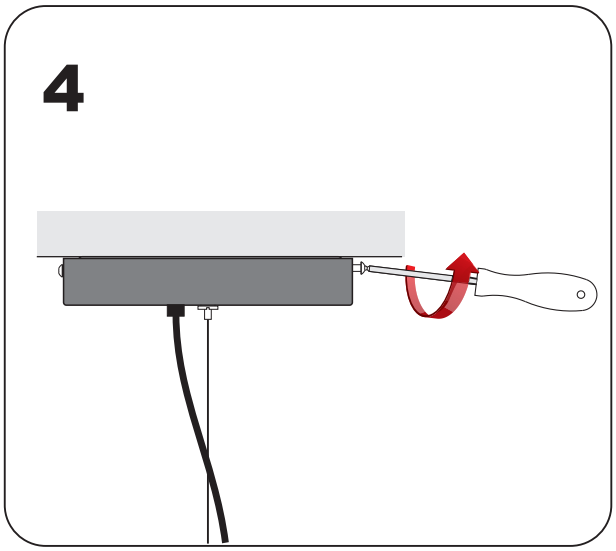
by a person familiar with the construction and operation of the product and the hazard involved.

Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor use only these product must be installed by a qualified electrician.


1
connection
inside the box
120V
AC POWER
SUPPLY
L
N
L
N


2
Adjust height / Ajustar la altura


3


4

